




INSTALLATION INSTRUCTIONS M1-2650 (MH1100) CROSS HANDLE BATH SHOWER MIXER

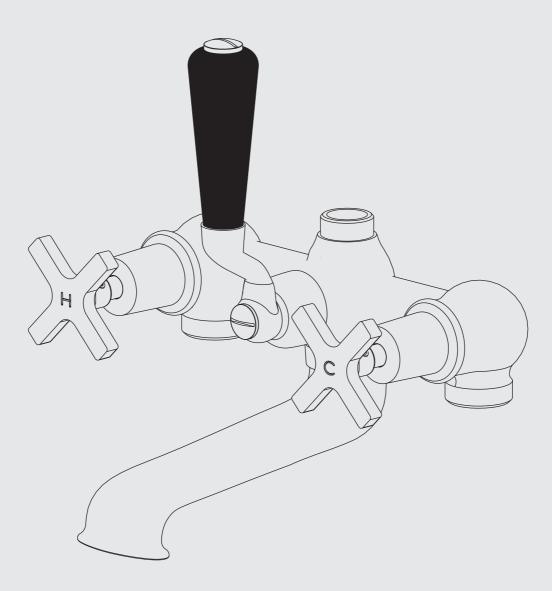

LEFROY BROOKS

Dimensions in Inches (& Millimetres)



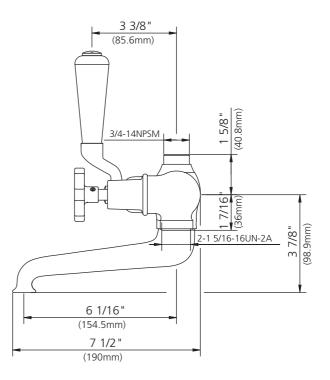

Whilst every effort is made to ensure accuracy, design and dimensions are subject to change without notice as part of the company's product development process.

What you need to know

Tools:

Adjustable Wrench Groove Joint Pliers Hacksaw Phillips Screwdriver Pipe Tape Spatula Spirit Level



Safety Tips

If you are soldering during faucet installation, remove cartridges, seats, gaskets and washers prior to applying flame, otherwise you will void the warranty.

Cover drain openings to avoid losing small parts.

When cutting or soldering pipe, use safety glasses to protect your eyes.

Maintenance

Your new bathroom faucet is designed for years of trouble-free performance.

Keep it looking new by cleaning it periodically with a soft cloth. Avoid abrasive cleaners, wire wool and harsh chemicals as these will dull the finish and void your warranty.

Important Points

Prior to beginning installation. turn off the cold and hot water lines and open the old faucet to release built-up pressure.

Overtightening nuts may cause damage.

Wrap all threaded connections with pipe tape available at your local plumbing supply store. Always wrap in a clockwise direction. The fittings should be installed by a state-licenced plumber.


Things You May Need

Correct installation may vary depending on previous faucet installation. All necessary supplies required for faucet installation are not included, but may be found where plumbing supplies are sold. It is suggested that IAPMO and/or CSA approved plumbing supplies are used during installation.

Standards

IAPMO/cUPC Listed Meets A112.18.1






Please note :

Final achievable flow rate is dependent on the outlets fitted, see relevant outlets (spouts, roses, sprays) for fully assembled product flow rate.

Steps 1-2

Installation Procedure

Lefroy Brooks always recommends that plumbing products be installed by a licensed professional. Shut off main water supply before installation.

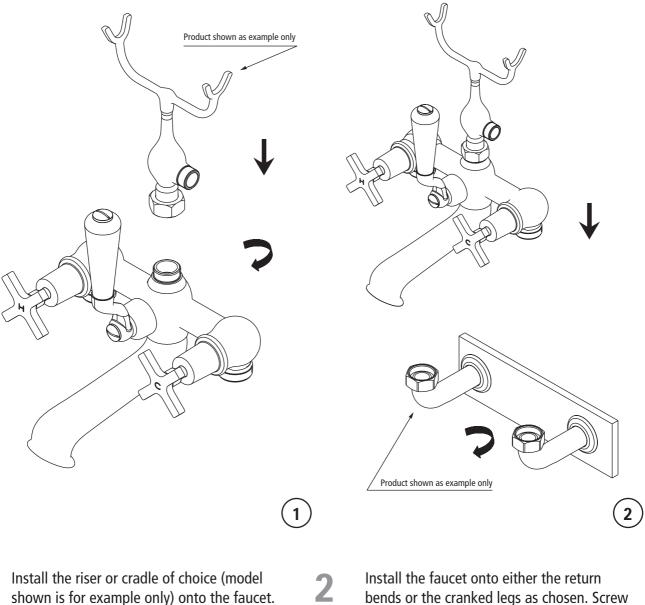


Screw the nut tightly to seal securely.

bends or the cranked legs as chosen. Screw the nut tightly to seal securely.

Step 3

Installation Procedure


Lefroy Brooks always recommends that plumbing products be installed by a licensed professional. Shut off main water supply before installation.

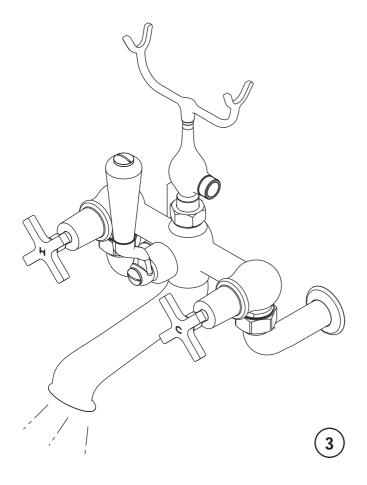

3 After installing faucet, open the hot and cold supplies to check for leaks. Turn on faucet handle for one minute to flush debris from faucet. Turn off the handle.

Exploded View

Parts List

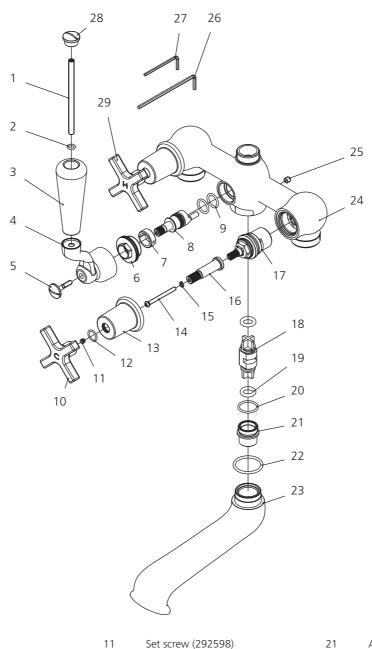

- 1 Screw (017839)
- 2 O-ring (004046N)
- 3 Diverter lever (108937)
- 4 Diverter seat (069036) 5 Screw (008266)
- 6 Nut (009353)
- Clip (012060) 7
- 8 Stem extension (110477)
- 9 O-ring (004021N)
- 10 Cross handle (C) (029685C)

- O-ring (048085N) 12
- Canopy (018254) 13
- 14 Screw (065035)
- 15 Washer (013570)
- Stem extension (110461) 16
- 17 Cartridge (507911) 18 Diverter cartridge (208020)
- 19 O-ring (004090)
- 20 O-ring (063066N)

- Adaptor (077173) 22 O-ring (004596N)
- 23 Spout (118559)
- 24 Body (066086)

26

27

- 25 Set screw (065154)
 - Allen key (031017)
 - Allen key (031000)
- 28 Lever cap (109380) 29
 - Cross handle (H) (029685H)

For additional assistance or service call

718-302-5292

9am to 5pm EST Monday to Friday



LEFROY BROOKS

www.lefroybrooks.com

LEFROY BROOKS INC, 1828 TROUTMAN STREET, RIDGEWOOD, NY, 11385 TELEPHONE: 718-302-5292. FAX: 718-302-4177

The use of trademarks, product design and artwork is subject to licence or agreement with Christo A. Lefroy Brooks. The design registrations, trademark registrations and copyrights are protected by law and the use or reproduction outside the terms of an agreement is prohibited. The right to modify designs and dimensions is reserved. Christo Lefroy Brooks is a member of ACID (Anti Copying in Design).